

1 2 3 4 5 6 7 8 9 10

A

B

C





D

E

F

NOTES: 1. MATERIAL:

- 1-1 Housing : Engineering plastic + LCP with G.F reinforced + black per UL 94V-0 rate.
- 1-2 Terminal : Phosphor Bronze + per JIS 5191 + 0.2t
- 1-3 Metal cover : Stainless steel sheet SUS304 + 0.2t
- 1-4 Lock Spring : Stainless steel SUS 301 + 0.3t.
- 2.PLATING: Solder zone: 0.381 μ m (15 μ ") gold plating in contact area.
2.54 μ m (100 μ ") matte Tin, 1.27 μ m (50 μ ") min. Nickel underplating over all.
- 3.RoHS compliant products.
- 4.OPERATING TEMPERATURE: -40°C~+85°C
- 5.ELECTRONICAL SPECIFICATION:
CURRENT : DC 0.5A
VOLTAGE : DC 5V
D.W. VOLTAGE : AC 500Vrms/min.

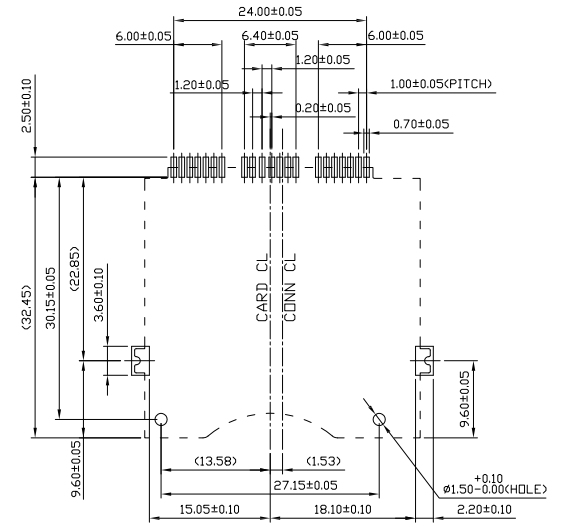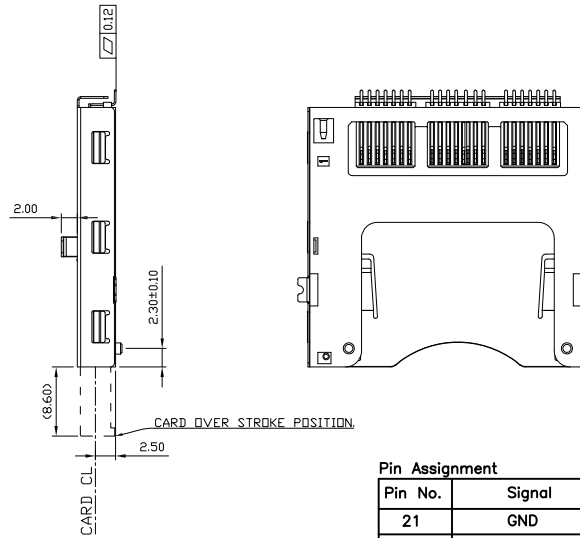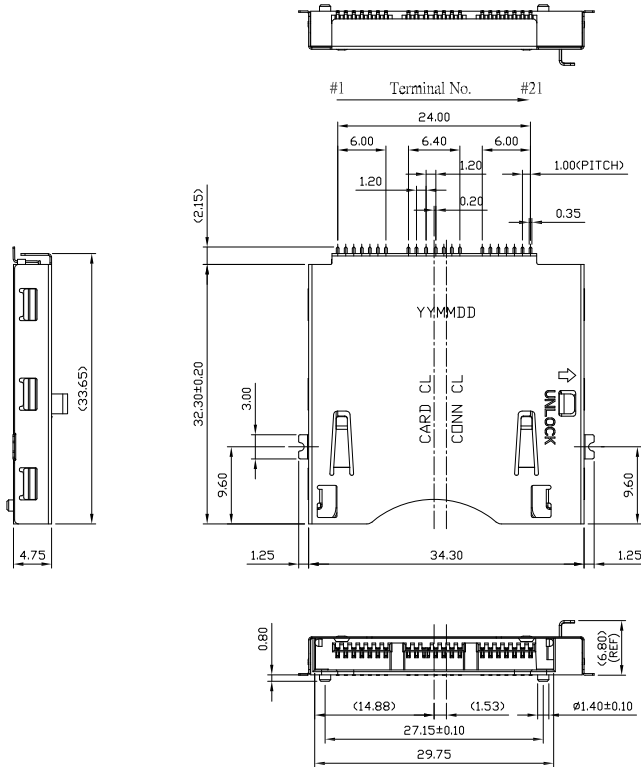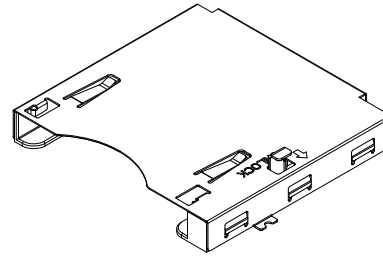

Pin Assignment

Pin No.	Signal
21	GND
20	PETp0
19	PETn0
18	GND
17	PERp0
16	PERn0
15	GND
14	REFCLK+
13	REFCLK-
12	INS#
11	CLKREQ#
10	+3.3V
9	PERST#
8	Reserved
7	Reserved
6	PETp1
5	PETn1
4	GND
3	PERp1
2	PERn1
1	GND

PROPRIETARY NOTE:
This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30
.XX ± 0.20
.XXX ± 0.15
X* ± 3'

APPROVED: Chris
CHECKED: Andy
DRAWN: Vic

UNITS: mm
SCALE: NONE

REGO
http://www.rego.com.tw

TITLE: CF EXPRESS HOST CONNECTOR WITH LOCK TYPE

PART NO: 821101-1120030

SHEET: 1 OF 1

B	24.3.2021
REV	DATE

1 2 3 4 5 6 7 8 9 10